

VERVE Clarity Outdoor Steam Sauna

VERVE®

VER-CLA-004

Assembly Instructions

For the easiest possible assembly of your **VERVE Clarity Outdoor Steam Sauna**, it is important to read the following instructions for this product.




Instructions before assembly:

- * At least two people are required to assemble the sauna.
- * Assembly location: Please assemble on the horizontal ground. If a slight slope will not affect the assembly, but If the slope is evident, It needs to use a pad to keep same level with the sauna.
- * All screw heads to assemble sauna must be completely inserted into wood to avoid scratching skin during use. If you want to assemble accessories provided by other companies to the sauna, please try to avoid metal accessories or insulate them.
- * Please find qualified electricians to install the electrical elements in sauna.


1.Tools we prepare:

Plastie Hammer x1


2.Tools you need to prepare:

Power Drill x 1	Adjustable Wrench x 2	Tape x 1	Nail gun x 1	Herringbone ladder x 1	Handheld Cutting Machine x 1
					

3. Installation structure:

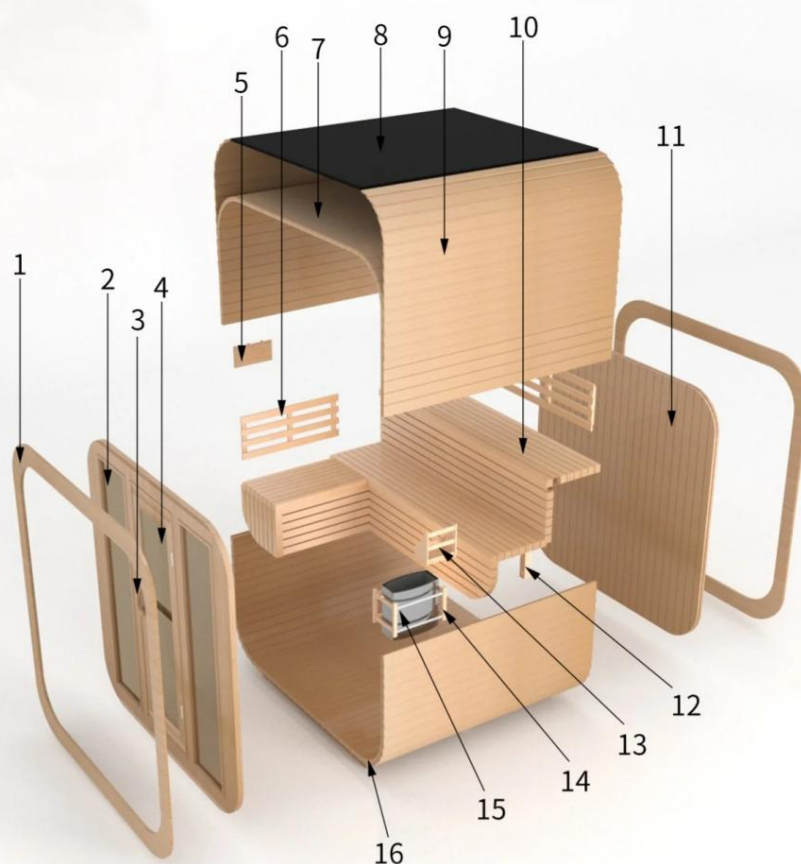


- 1. Gables
- 3. Door handle
- 5. Towel rack
- 7. Staves
- 9. Wood shingles
- 11. Backplane
- 13. Cup holder
- 15. Sauna stove


- 2. Front brown glass panel
- 4. Brown glass door
- 6. Backrest
- 8. Tarps
- 10. Back benches
- 12. Seat support
- 14. Furnace frame
- 16. Cradle

Installation Instructions


1.Base Assembly Step:

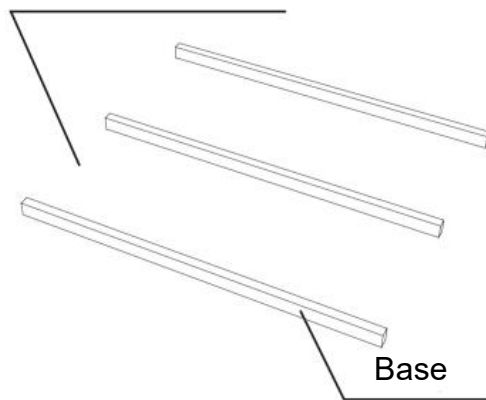

The distance between foundations is guaranteed to be the same. (Letter number: A)

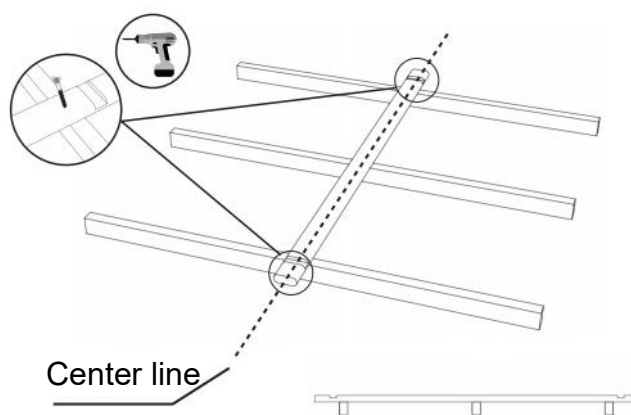


Place the wooden strips that are convex on both sides in the middle of the foundation and secure with screws. (Letter number: B)

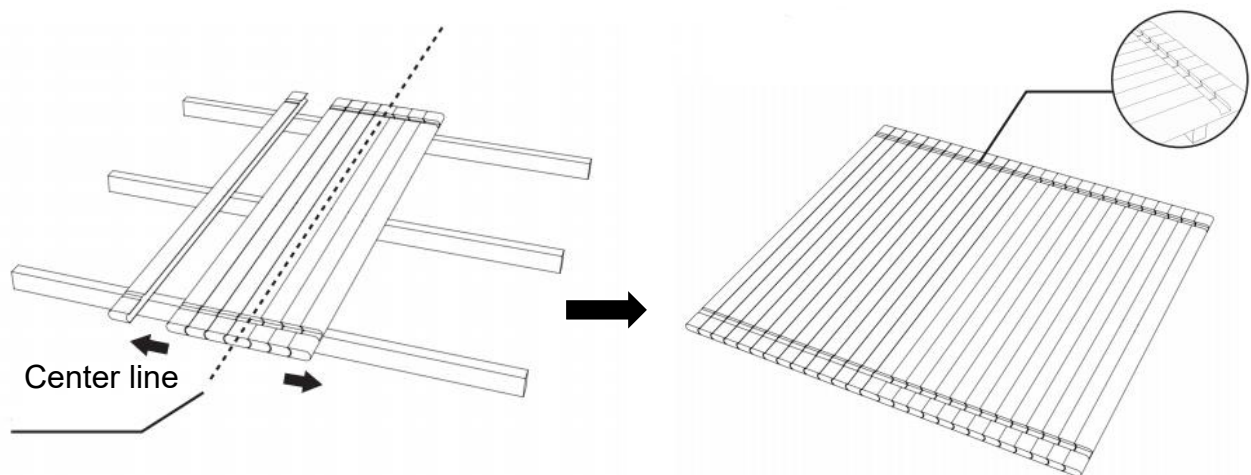

Laying boards from the middle to both sides.
(Which boards have holes that are not in the grooves.)


Slot Alignment.

2.Front and Back Wall Assembly:

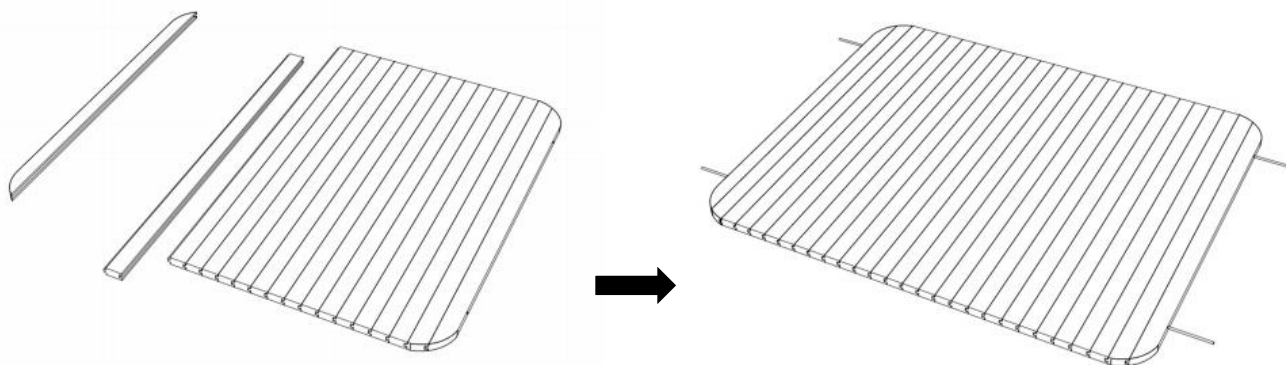


Splice the back panels together to ensure that all the planks are on the same Horizontal line at the head and tail.(Letter number: E)

Pass the 2 steel rods (letter number: Q) through the holes on the side of the back plate respectively.

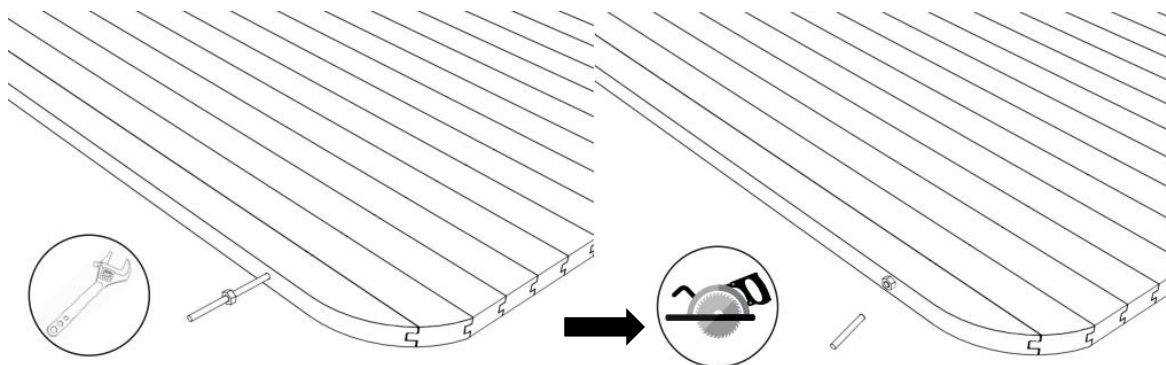


Tighten the screws and subtract the excess with a handheld cutter.

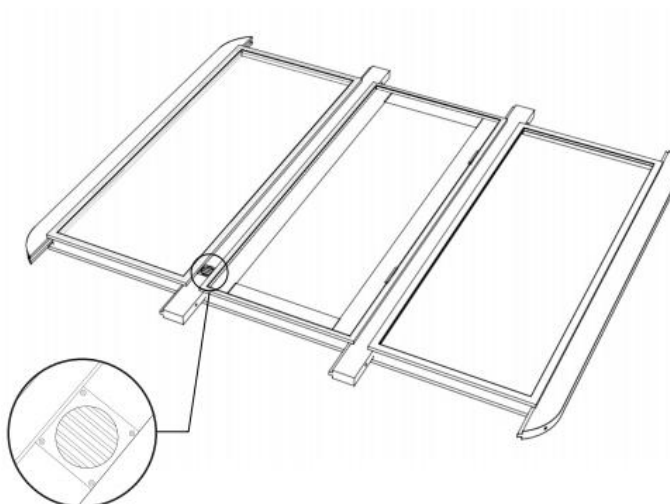


Position the front as shown.


Place the top and bottom small pieces of wood while threading the rod through the reserved holes. (Letter number: D)

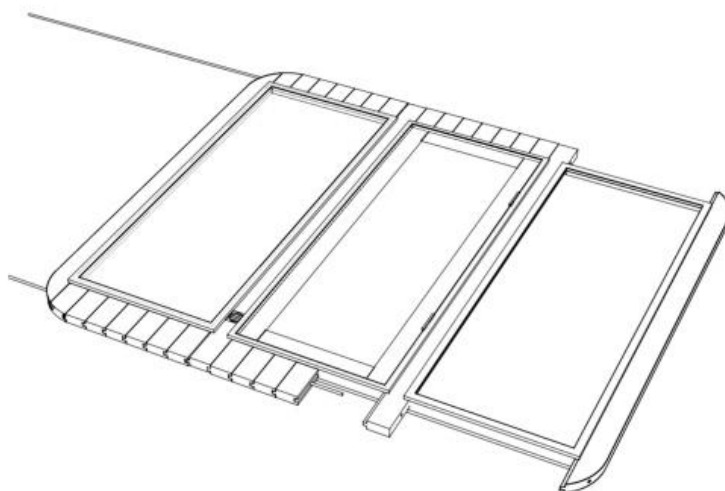

Place the front plate into the groove.

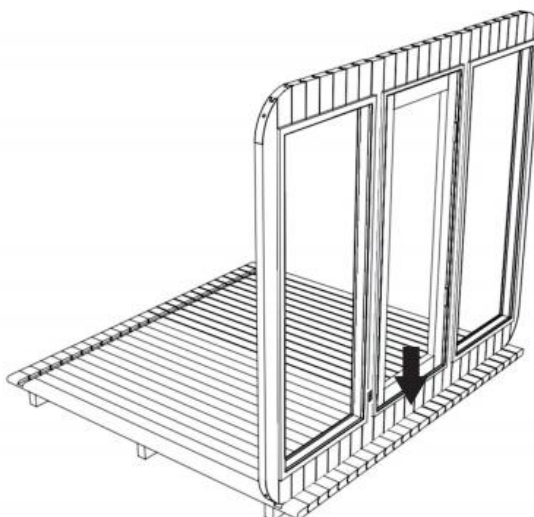


Put the back plate into the groove.

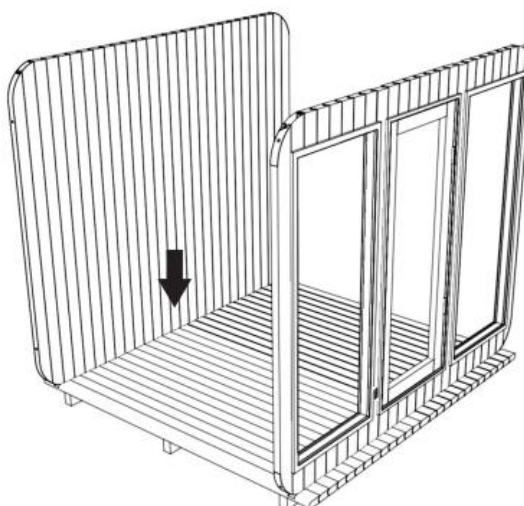


3.Stave assembly:

Place 3-5 staves on the top of the sauna for fixation.

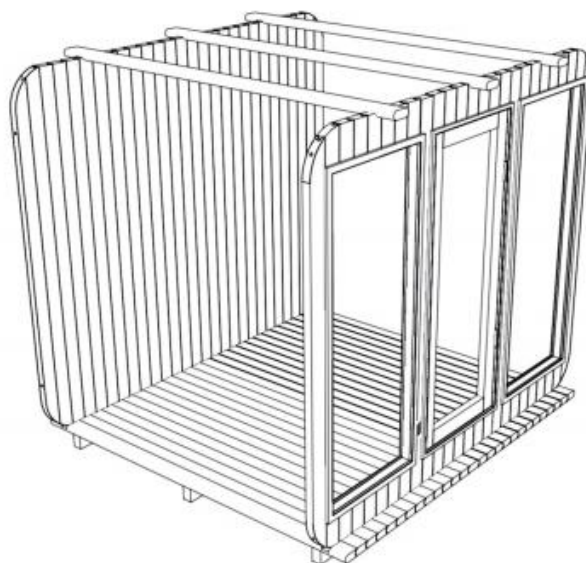


The stave covering the lower fillet needs to be fixed with screws.

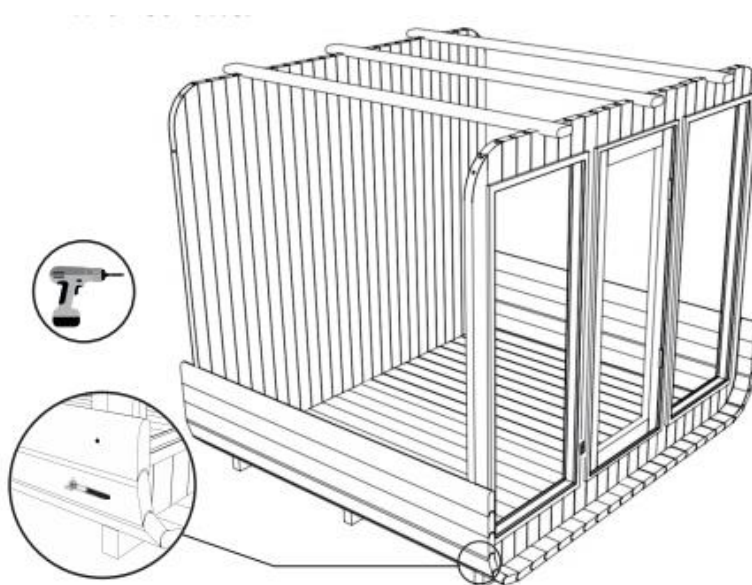

Note:


Staves with reserved holes are placed in this position first.
If not, drilling will be required.

The side panels can be fixed with screws every 1-2 staves.

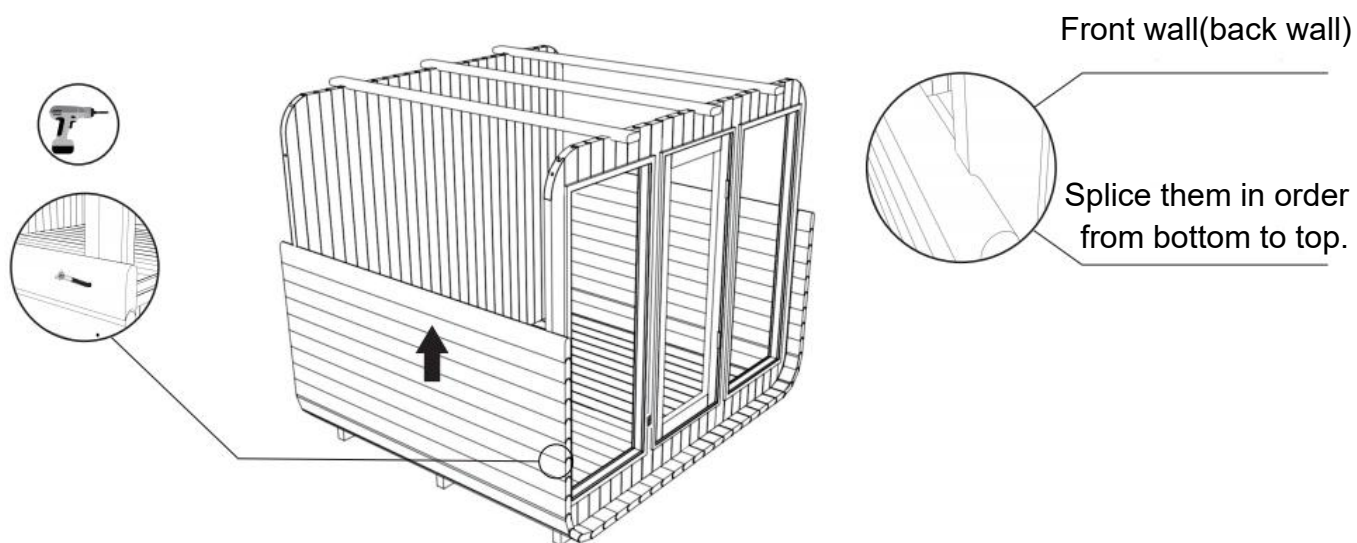


The stave covering the lower fillet needs to be fixed with screws.

Note: Staves with reserved holes are placed in this position first.
If not, drilling will be required.

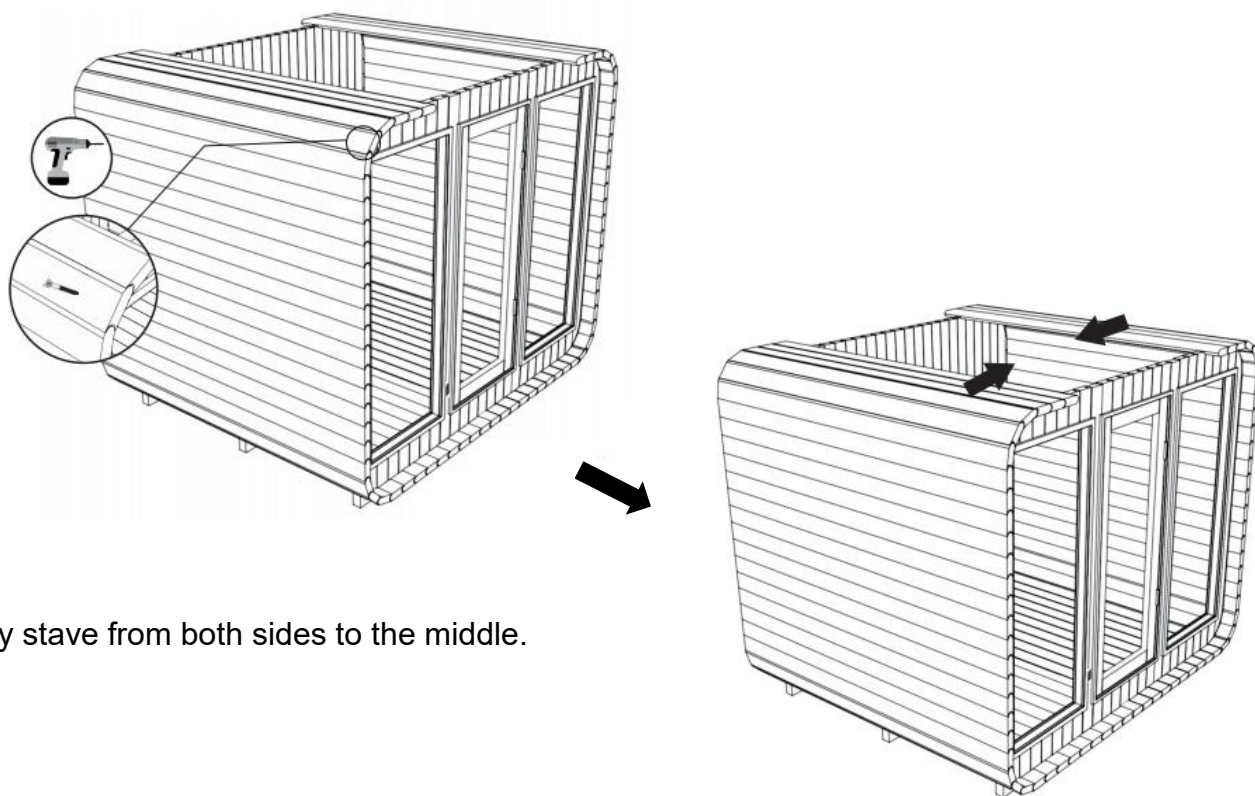


4.Seat installation:


Fix with screws, the bracket has reserved holes. (Letter number: K)

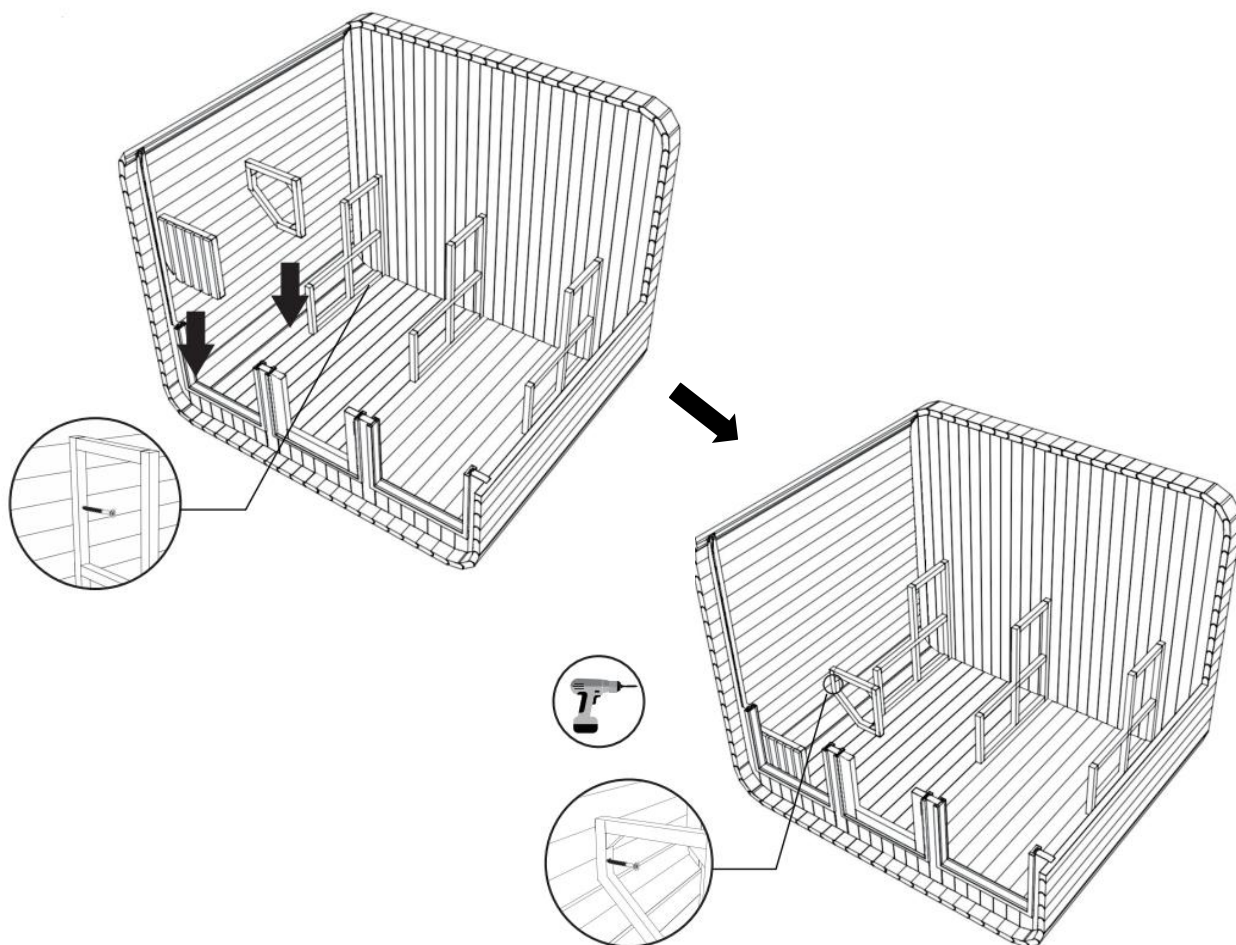

Place the seat plate first (letter number: H), then place the seat riser plate (Letter number: I). Once placed, secure it to the support with screws.

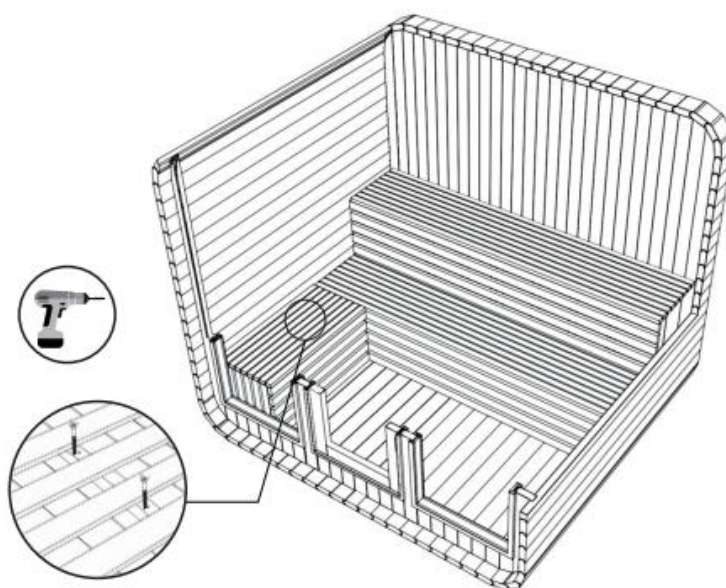


Fix with screws, the bracket has reserved holes.

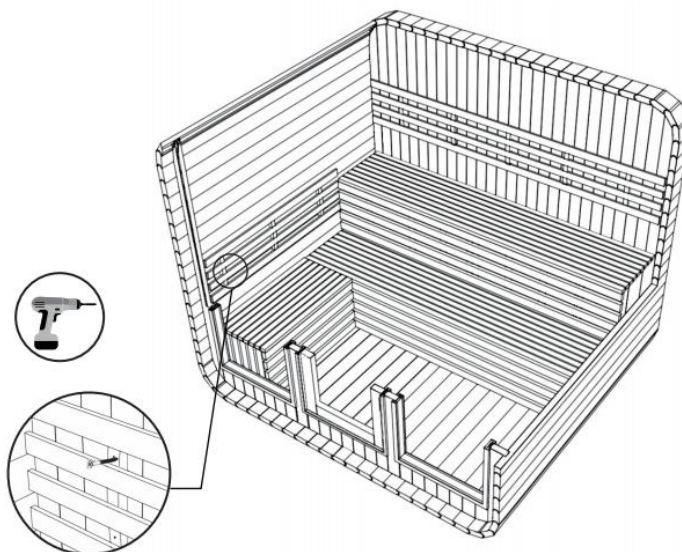


5.Door installation:

Use screws to secure door handles on both sides of the door. (Letter number: O)

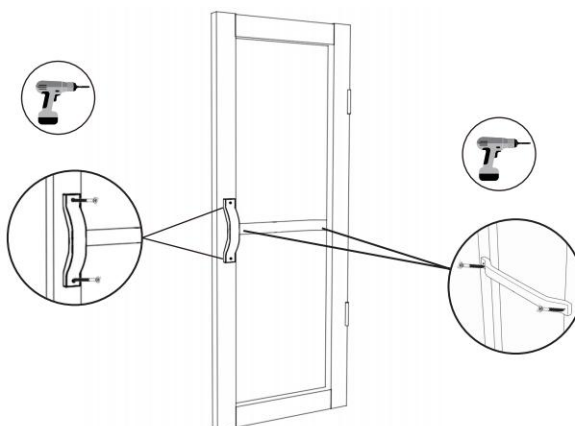


Display of main body installation completed.

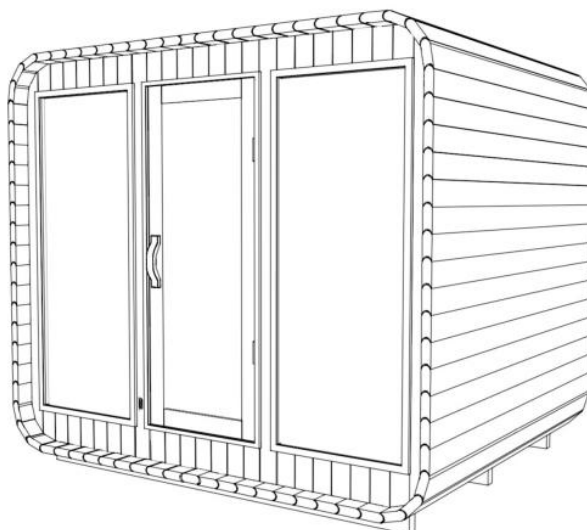


6. Waterproof layer installation:

Spread the tarp over the top of the sauna. (Letter number: R)


Note: The tarp should extend beyond the outside of the sauna's slats, as shown in the photo.

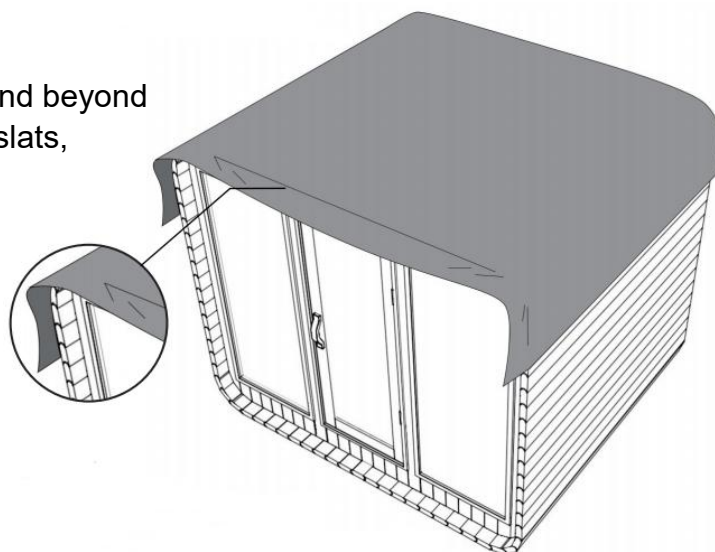

Fasten the front and rear decorative strips with screws. (Letter number: F and G)

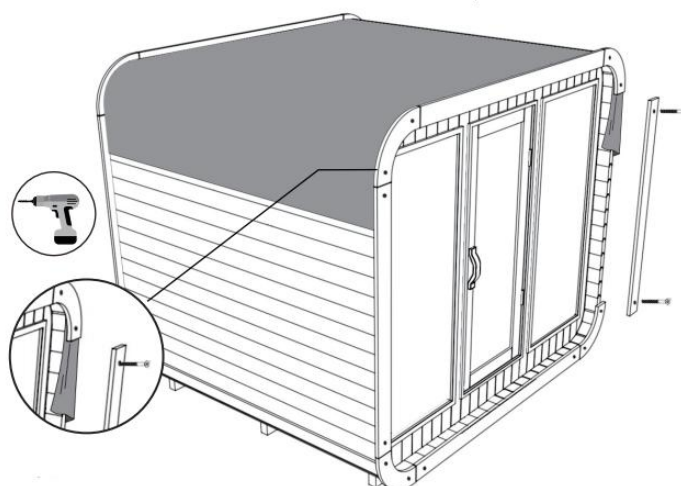


From bottom to top, secure the side flashings with a nail gun.

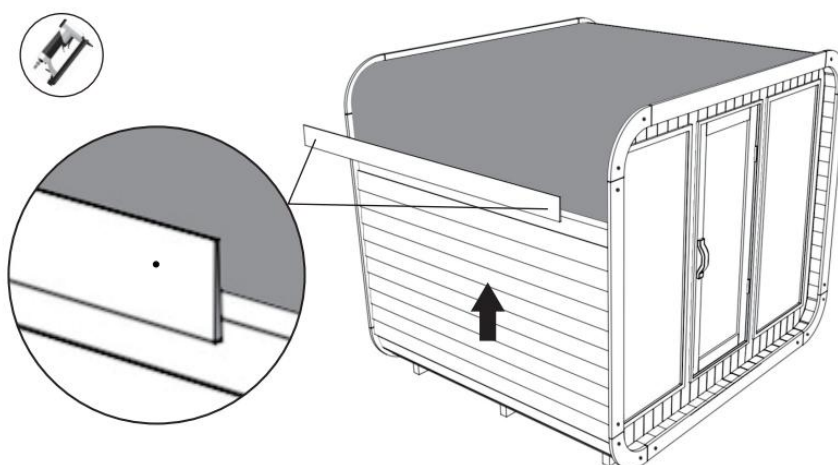


Note: The thick side of the flashing is placed underneath.

7.Accessories installation:


The storage rack has reserved holes and is fixed with screws. (Letter number: P)

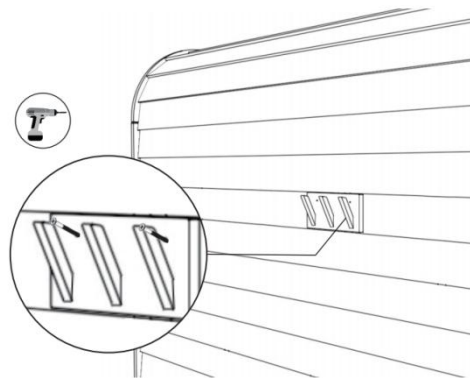


The storage rack has reserved holes and is fixed with screws. (Letter number: M)

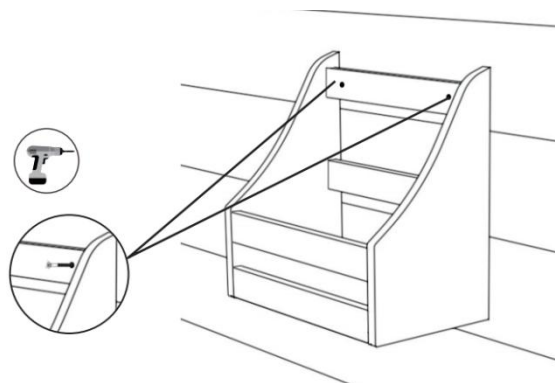

The heater fence has reserved holes and is fixed with screws. (Letter number: L)

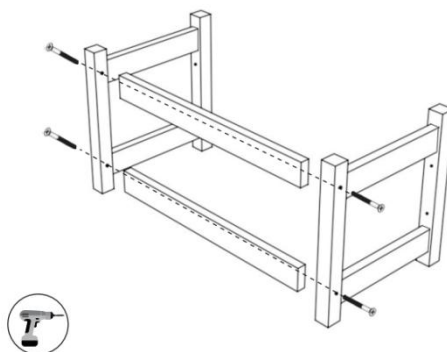

The heater fence has reserved holes and is fixed with screws.

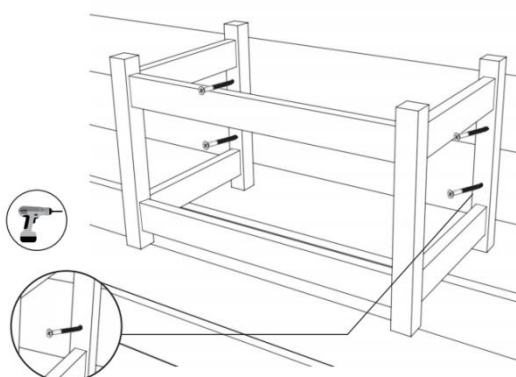

Instructions:

Maintenance instructions:

- (1) Turn on sauna heater, setting desired temperature, normally 60~80 Celsius (in the area between bench surface and your head). Start with low temperature and increase it according to endurance of your body when you are in a sauna for the first time.
- (2) Before the sauna, take off clothes, glasses, jewelries, cell phones and other belongings, and then take a simple shower or spa.
- (3) The average sauna period for each time is around 5-15 minutes.
- (4) After a sauna, you can take a bath in a swimming pool or take a shower to cool your body for 10-20 minutes.
- (5) After re-entering the sauna, you may find there are drops formed by vapor on sauna stones. If water drops to the ground, it means you are overusing the sauna.
- (6) At least rest for 20 minutes after the last time in sauna.
First take a shower with soap and warm water, then with cool water to close skin pores.
Put on clothes after your body temperature completely lowers.
(Children must be complained by parents)

Suggestions:

- (1) Paint the surface of sauna annually. You can choose the wood wax coating service provided by our company when purchasing the product.
- (2) Put a carpet before the door to keep the floor clean.
- (3) Brush obstinate stains on the sauna with sandpaper for daily maintenance.
- (4) Replace sauna stones after over 500 hours in normal use.